

THE NEW
ISUZU
MUX

ALL MUSCLE. ALL HEART.



ISUZU

SPECIFICATIONS

ENGINE	
Type	ISUZU Ddi VGS Turbo Hi-Power
Description	2999 cm ³ (3.0 Litres) turbo diesel, in-line 4-cylinder, DOHC, 16-valve
Displacement	2999 cm ³ (cc)
Max. Power	130 kW (177 PS) @3600 rpm
Max. Torque	380 Nm @1800-2800 rpm
Bore x stroke	95.4 mm x 104.9 mm
Compression ratio	17.5 : 1
Cylinder head	ISUZU-patent special aluminium alloy with double-walled water jacketing
Cylinder block	Cast iron upper with advanced anti-friction induction-hardened cylinder bores, cast alloy lower
Valve train	Heavy-duty steel chain-driven dual overhead camshafts (DOHC), roller rockers, 4 valves per cylinder
Fuel injection	Electronic high pressure common-rail diesel-direct injection (Ddi)
Air induction	Intercooled Variable Geometry System (VGS) turbo charger with Variable Swirl System (VSS)
Pistons	Special graphite coated pistons with heat-resistant integrated ring carrier (top ring) & nickel composite piston rings
Emission level	Bharat Stage 4
TRANSMISSION	
Type	Automatic with Sequential Shift & Brake Shift Lock Electronically controlled with Adaptive Grade Logic & fuel-saving Lock-up Torque Converter Adaptive Grade Logic Control: holds gear in varied-gradient ascents, selects gear on steep descents to hold speed with engine braking Uphill & Downhill Drive Control (transmission based)
4x4 system	"Terrain Command" control with 'shift-on-the-fly' 2-high ↔ 4-high selection at up to 100 km/h
Drivetrain system	Electronic Stability Control (ESC) & Traction Control System (TCS)

CHASSIS	
Frame	Separate, full-length heavy-duty ladder construction chassis
Front suspension	Independent, Double wishbone, coil springs, gas shock absorbers, stabiliser bar
Rear suspension	Penta-link coil suspension, gas shock absorbers, stabiliser bar
AXLES	
Front	Independent. 4x4: fully floating with outer CV & inner double offset joints
Rear	Rigid semi-floating banjo with hypoid final drive
STEERING	
Type	Speed-sensitive variable capacity power-assisted rack & pinion system
Adjustment	Tilt-adjustable steering wheel
BRAKES	
Type	Power-assisted via 266 mm (10.5 inch) servo unit 4-Channel 4-Sensor Anti-Lock Brake System (ABS) with Electronic Brakeforce Distribution (EBD) & Emergency Brake Assist (EBA)
Front	300 mm dia ventilated front disc with twin-pot calipers
Rear	318 mm dia ventilated rear disc
WHEELS	
Rim	18x7J-33, Diamond-cut Alloy
Tyre	255 / 60 R18
Full-size alloy spare wheel	
CAPACITY	
Seating	7 persons
Fuel Tank	65 Litres capacity High Density Polyethylene (HDPE) tank
PERFORMANCE	
Min. Turning Radius	5.8 m
Max. Gradeability	4x2 mode 25° 4x4 mode 30°



Silky White Pearl



Cosmic Black Mica



Ruby Red Mica






Obsidian Gray Mica



Titanium Silver Metallic

DIMENSIONS (UNIT : mm)

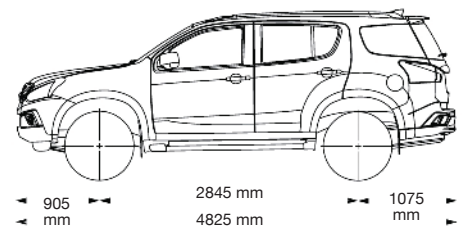

Sole Distributor of ISUZU Motors in Nepal

CONTINENTAL TRADING ENTERPRISES PVT. LTD.

GAIRIDHARA, KATHMANDU: +977-1-4426465, 4426475 | SERVICE CENTER - BALAJU: 01-4384096

f ISUZU Nepal youtu.be/IsuzuNepal i www.instagram.com/IsuzuNepal

For more information, visit us at:



DEALER NETWORK: KATHMANDU - Times Motors : 01-5187151, 9801017789, 9801017733, 9801017744, BIRTAMODE - Absolute Motors : 023 - 540982, 9862222200, 9802079188
ITAHARI - Om Sai Moto Corp Pvt. Ltd. : 025-589377, 9852085085, **BIRATNAGAR** - Kesharichand Bhanwarlail : 021-463362, 9852021675, 9852082651
JANAKPUR - Luxury Auto Pvt. Ltd. : 9852029517, 9854029676, **BIRGUNJ** - Luxury Auto Pvt. Ltd. : 9855022522, 9802090009
BHARATPUR, CHITWAN & KAWASOTI, NAWALPUR - Sakura Ventures Pvt. Ltd. : 078-540127, 9801353753 9801353754, **POKHARA** - Rays Motors : 061-537333, 9856023793
BUTWAL - 9857042499, **BHAIRAHAWA** - Safal Auto United Pvt. Ltd. : 9857042326
DANG, NEPALGUNJ & DHANGADI - Kisan Trading Concern Pvt. Ltd. : 091-416592, 081-565429, 082-560107, 9801720444